

INSTRUÇÃO DE MONTAGEM ASSEMBLY INSTRUCTIONS

Aviso Importante:

A SANINDUSA declina qualquer responsabilidade em eventuais danos provocados por montagem não conforme com as respectivas instruções, bem como devido a alterações que englobem a não utilização de peças que fazem parte integrante do(s) conjunto(s).

Warning:

SANINDUSA declines any responsibility for any damage caused by not having followed the instructions for assembly or by the use of strange parts to the set.

Características técnicas:

- Cartucho de discos cerâmicos - d35 axial
- Pressão caudal - Min. 0.5 bar / Max. 5bar
- Pressão recomendada de trabalho - 3 bar
- Resistência à pressão estática - Max. 20 bar

1 - Para pressões estáticas superiores a 5 bar aconselha-se a instalação de um redutor de pressão.




2 - Evitar grandes diferenças entre pressões de água quente e fria.

Technical Data:






- Ceramic disc cartridge – d35 axial
- Water Service Pressure:
 - Recommended: 3 bars
 - Minimum: 0.5 bar
 - Maximum: 5 bar
- Static pressure resistance - Max. 20 bar

1 - With static pressure of more than 5 bar, use a pressure reducing valve for reduction.

2 - To ensure the best performance of the mixer, the service pressures for hot and cold water, have to be kept as balanced as possible.

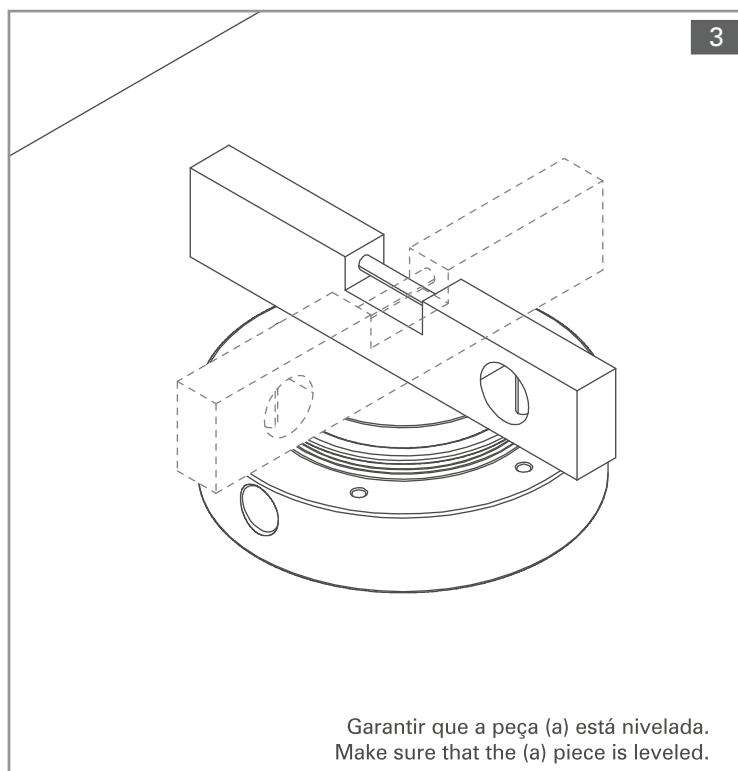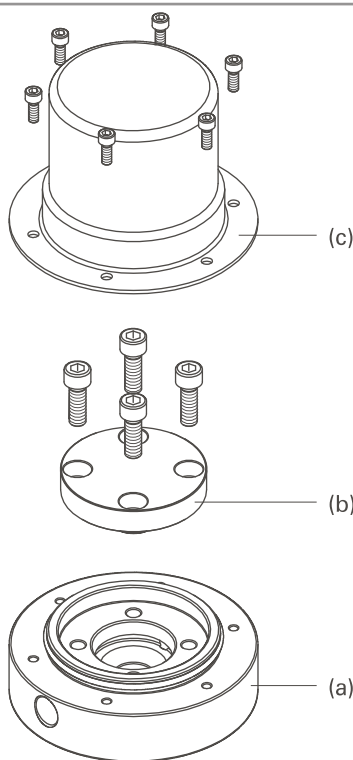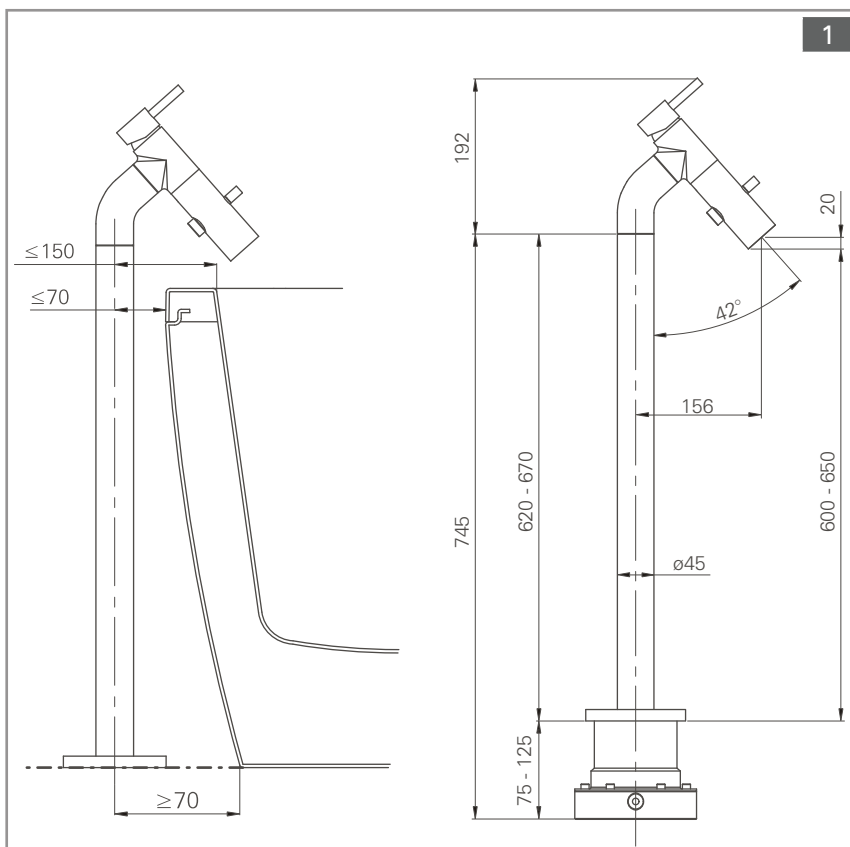

INSTRUÇÃO DE MONTAGEM ASSEMBLY INSTRUCTIONS

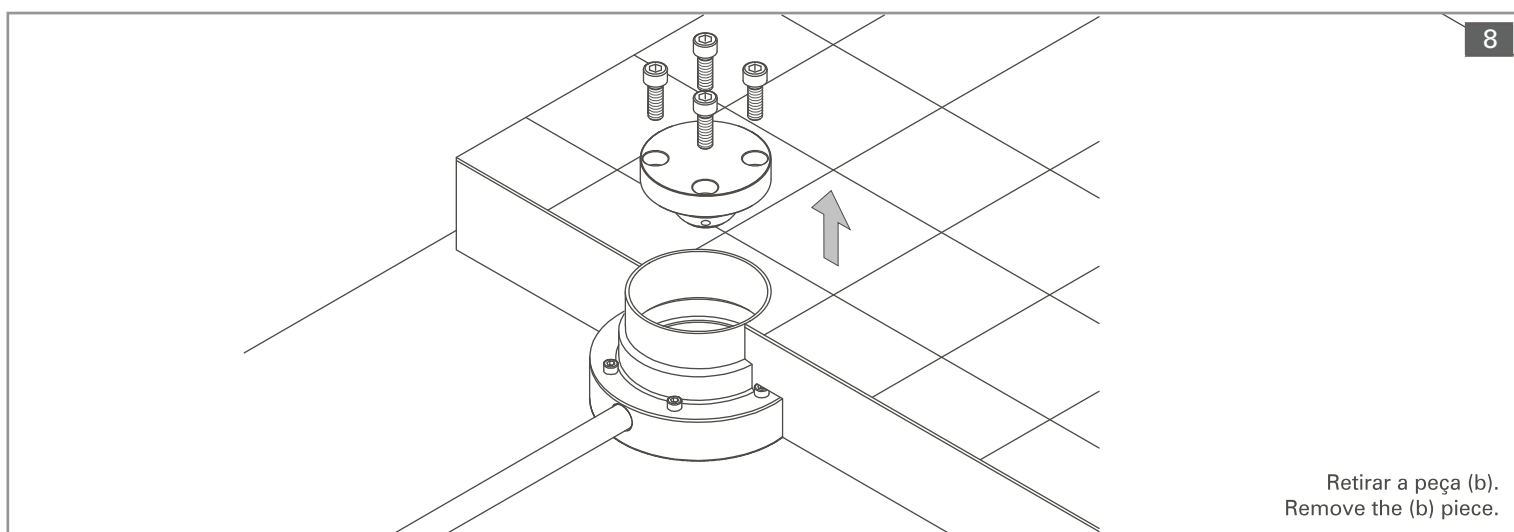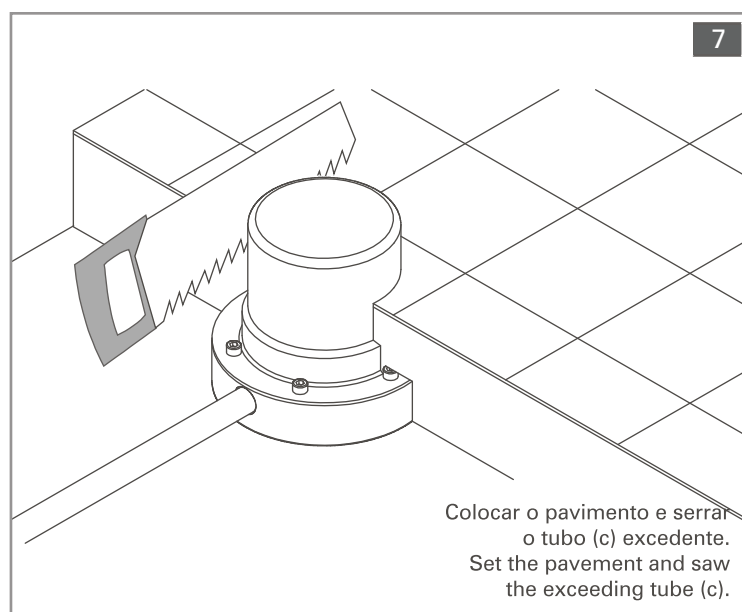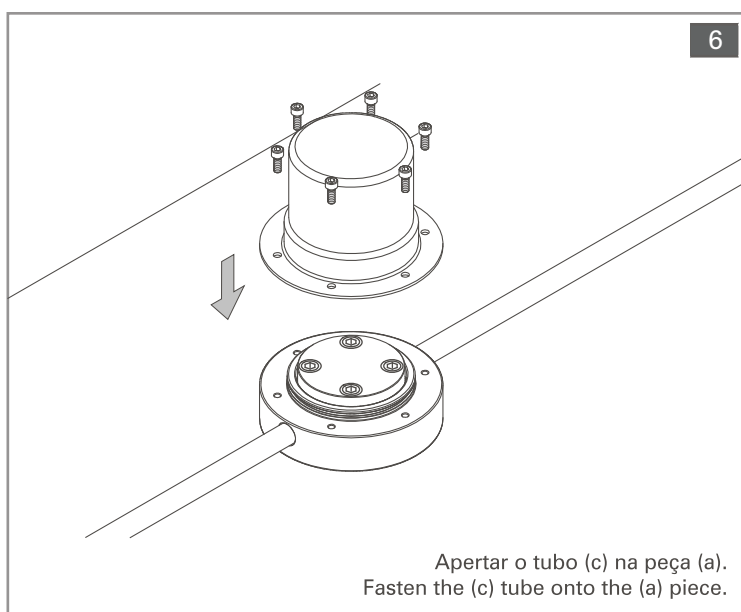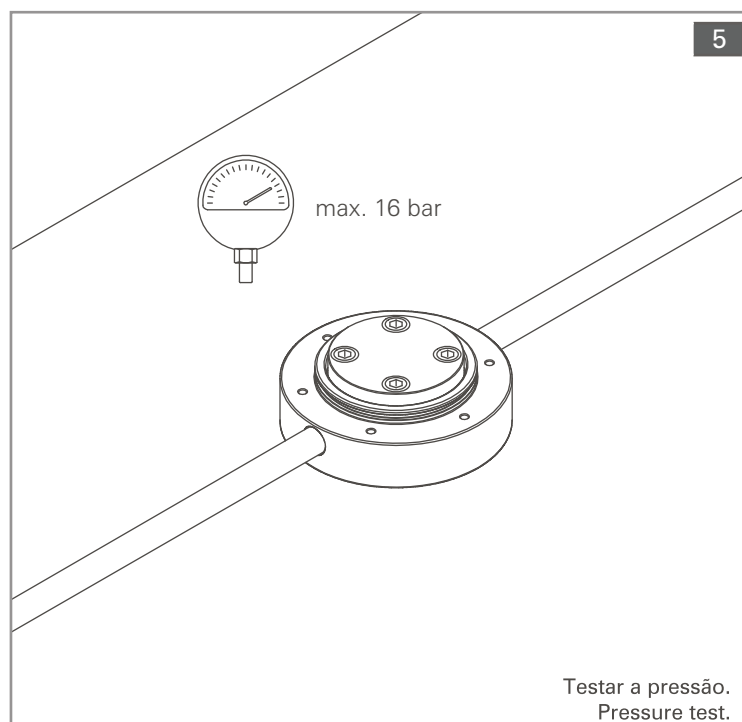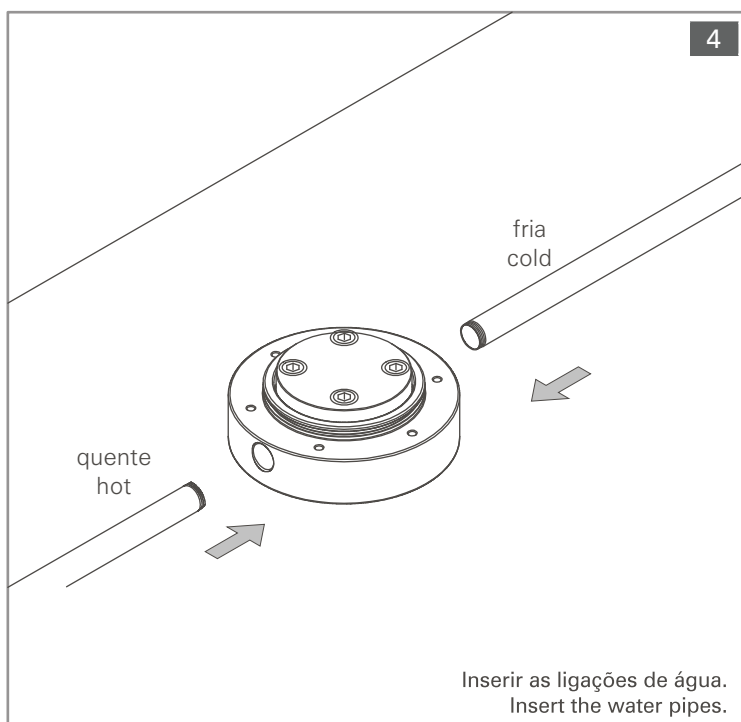

INSTRUÇÃO DE MONTAGEM ASSEMBLY INSTRUCTIONS

